


Click Torque wrenches



Digital Calibration ISO 6789:2003. issuing certificate of CENAM traceability.

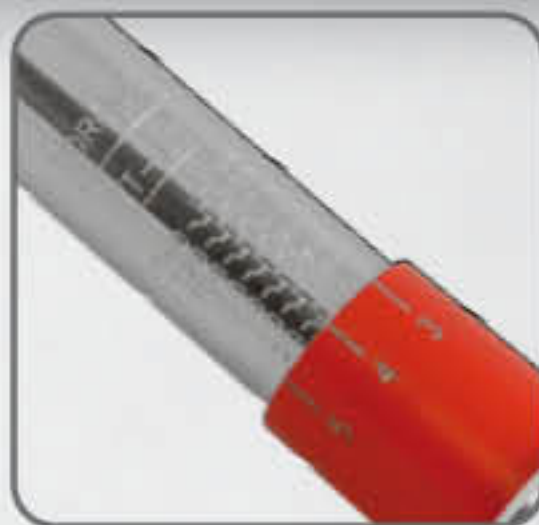

Professional one-scale (NB, in-lb or ft-lb)

1 YEAR WARRANTY
REVERSIBLE

General Uses

- Click torque wrenches are easy to operate and are mainly used in the automotive and aviation industry.

System Quick Release

Chrome and nickel plated.

Drives

1/4" 3/8" 1/2" 3/4" 1"

Internal Design Double Weave

Minimizes effort required, decreases friction and extends the life of the torque wrench.

Torque range.

Safety ring.

Metal

Handle

Click torque wrenches

ITEM	LENGTH	TORQUE RANGE	INCREMENT DUAL SCALE	DRIVE	WEIGHT	
Torque Range (<i>ft-lb</i>)						
6007FL	16 3/4"	5-75 ft-lb	0.5 ft-lb	3/8"	2,24 lb	1
6010FL	16 3/4"	10-100 ft-lb	1 ft-lb	3/8"	2,24 lb	1
6015FL	20 1/2"	20-150 ft-lb	1 ft-lb	1/2"	3,63 lb	1
6025FL	23 3/4"	30-250 ft-lb	1 ft-lb	1/2"	3,96 lb	1
6045FL	40 15/16"	50-450 ft-lb	5 ft-lb	3/4"	11,68 lb	1
6060FL	48 7/16"	100-600 ft-lb	5 ft-lb	3/4"	14,10 lb	1
601KFL	45 11/16"	200-1000 ft-lb	5 ft-lb	1"	23,36 lb	1
Torque Range (<i>in-lb</i>)						
6005IL	8 1/16"	10-50 in-lb	0.05 in-lb	1/4"	0,66 lb	1
6015IL	8 1/16"	20-150 in-lb	1 in-lb	1/4"	0,66 lb	1
6025IL	9 9/16"	30-250 in-lb	2 in-lb	3/8"	0,74 lb	1
601KIL	16 3/4"	200-1000 in-lb	1 in-lb	3/8"	2,24 lb	1
603KIL	23 3/4"	600-3000 in-lb	1 in-lb	1/2"	3,96 lb	1
Torque Range (<i>Nm</i>)						
6002NM	9 9/16"	5-25 Nm	0.2 in-lb	1/4"	0,74 lb	1
6010NM	16 3/4"	20-100 Nm	0.5 in-lb	3/8"	2,24 lb	1
6035NM	23 3/4"	50-350 Nm	2 in-lb	1/2"	3,96 lb	1
6080NM	48 7/16"	150-800 Nm	5 in-lb	3/4"	14,10 lb	1

